




**CENTER TOWNSHIP WATER AUTHORITY**  
224 CENTER GRANGE ROAD  
ALIQUIPPA, PA 15001  
724-774-7960  
FAX 724-774-7049

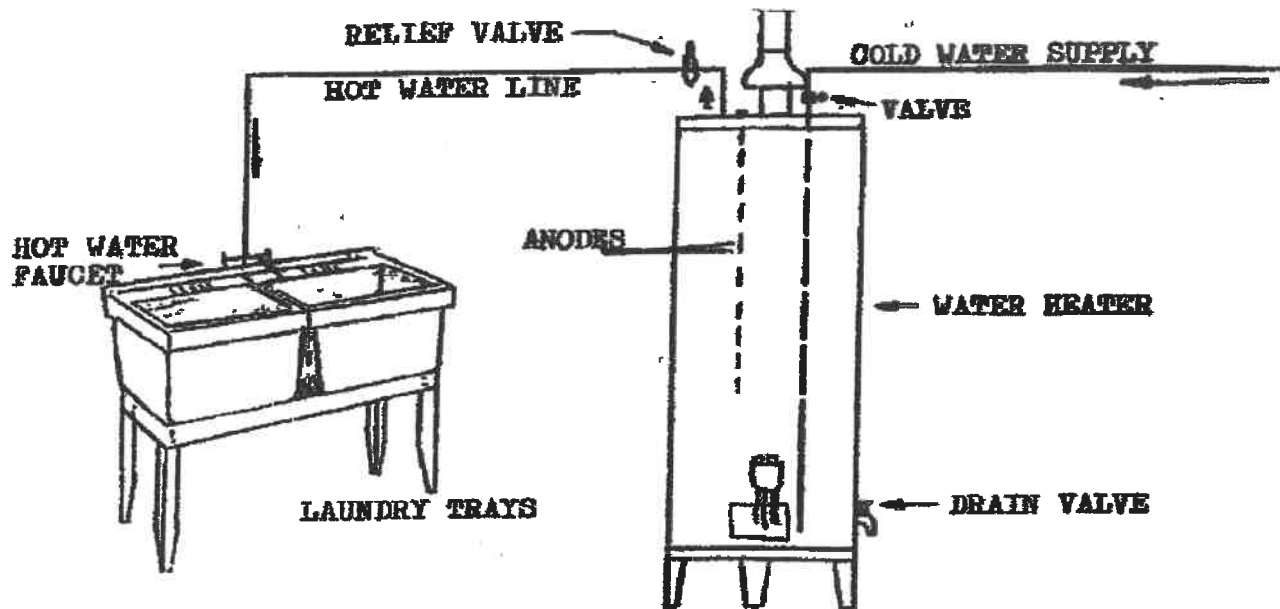

### **TO FLUSH AND CLEAN HOT WATER TANK**

1. TURN TANK THERMOSTAT TO COLD BEFORE STARTING TO FLUSH. IT IS NOT NECESSARY TO SHUT OFF PILOT LIGHT.
2. CLOSE VALVE IN COLD WATER SUPPLY PIPE.
3. OPEN DRAIN VALVE AT BOTTOM OF HOT WATER TANK.
4. OPEN HOT WATER FAUCET IN LAUNDRY TUB OR KITCHEN SINK.
5. DRAIN TANK COMPLETELY.
6. FLUSH BOTTOM OF TANK THOROUGHLY BY OPENING COLD WATER VALVE FOR APPROXIMATELY 30 SECONDS THEN CLOSE AND DRAIN.
7. #6 MUST BE REPEATED UNTIL WATER IS CLEAR.
8. PROPER FLUSHING TAKES TIME. DO NOT HURRY THE JOB.
9. SHUT OFF FAUCET IN LAUNDRY TUB OR KITCHEN SINK.
10. CLOSE DRAIN VALVE ON TANK.
11. OPEN COLD WATER VALVE.
12. TURN THERMOSTAT UP TO NORMAL TEMPERATURE.
13. IF THIS DOES NOT SOLVE YOUR PROBLEM, THE ANODES IN THE TANK SHOULD EITHER BE REMOVED AND REPLACED OR SIMPLY REMOVED FROM THE TANK.